

# Split Core Current Transformer



Shenzhen Sensor Electronic  
Technology Co.,Ltd

## CE-IJCT-24-5

Output:40mA,42mA,50mA,60mA,65mA,66.6mA,80mA,83.3mA,


100mA optional

Aperture: F 25mm; Accuracy: 2%

### Specifications

Operating Temperature:	-40~80°C
Primary Current (Amp.)50/60Hz:	100A-300A
Accuracy @ $R_L \leq 10\Omega$ :	Class 2%
Turns Ratio:	1:1000; 1:1500; 1:2000; 1:2500; 1:3000; 1:5000; 1:6000 optional
Phase error at rated current range:	$\pm 1^\circ$
Dielectric Withstanding Voltage (Hi-pot):	4000V/1mA/1min
Impulse Withstand Voltage:	5KV Peak
Insulation Resistance:	DC500V/100M $\Omega$ min
Opening Dimension:	28mm Min.

### Dimensions

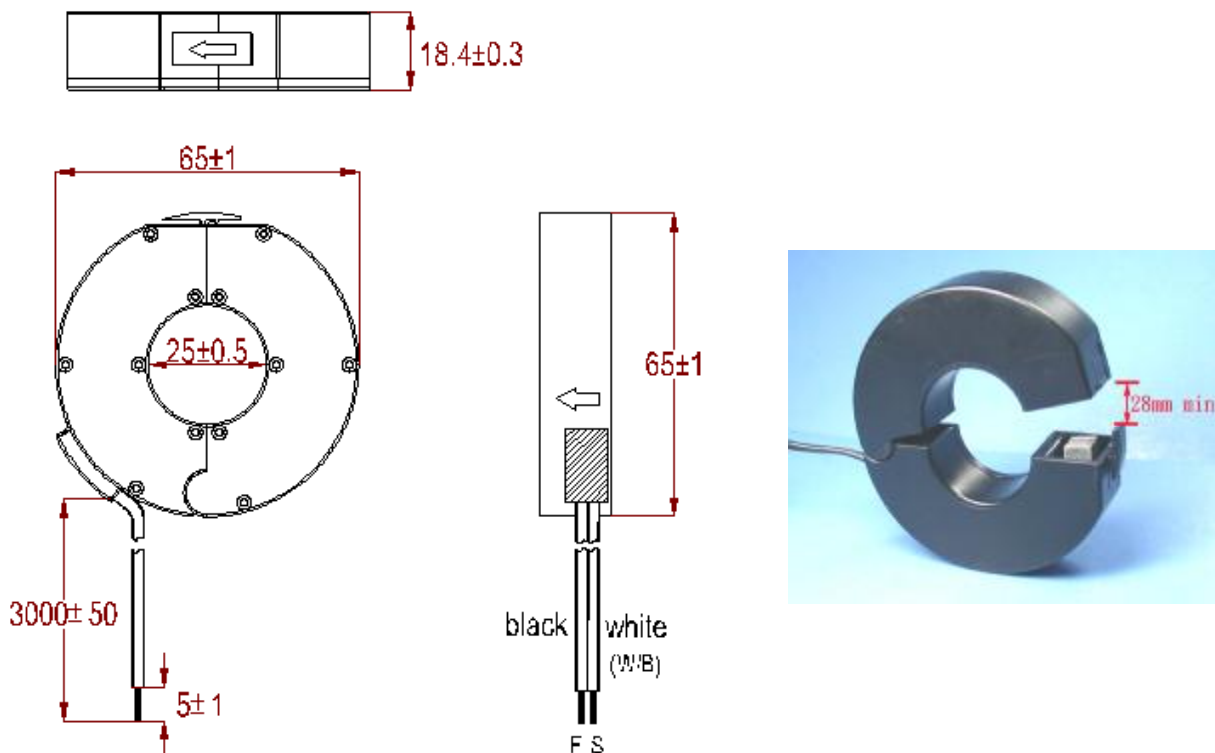

### Test Circuit:

