

# Split Core Current Transformer



Shenzhen Sensor Electronic  
Technology Co.,Ltd

## CE-IJCT-24-C


Output: 100mA, 5A optional

Aperture: F 35.7mm; Accuracy: 1%


### Specifications

Operating temperature:	-40~85℃
Primary Current (Amp.)50/60Hz:	200A~600A
Accuracy @ $R_L \leq 10\Omega$ :	Class 1%
Turns ratio:	1:40,1:60,1:80,1:100,1:120, 1:2000; 1:3000; 1:4000; 1:6000 optional
Dielectric Withstanding Voltage (Hi-pot):	4kV/1mA/1min
Insulation Resistance:	DC500V/100M $\Omega$ min
Opening Angle:	180 degree


### Dimensions

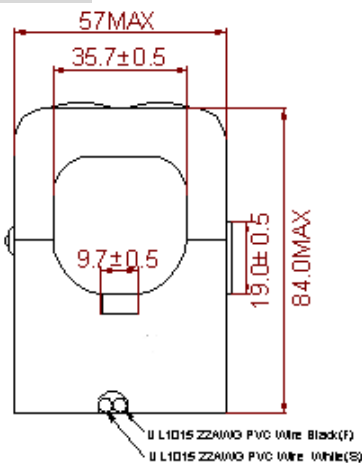

Front View



Bottom View

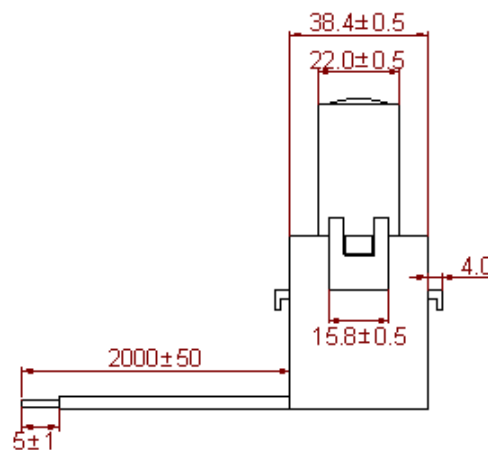

Right View



### Test Circuit:

