

Split Core Current Transformer



Shenzhen Sensor Electronic
Technology Co.,Ltd

CE-IJCT-24-D


Output: 33.3mA, 50mA optional

Aperture: F 10.5mm; Accuracy: 1%

Specifications

| | |
|---|--------------------------|
| Operating temperature: | -40~85℃ |
| Primary Current (Amp.)50/60Hz: | 100A~150A |
| Accuracy @ $R_L \leq 10\Omega$: | Class 1% |
| Turns ratio: | 1:2000; 1:3000 optional |
| Dielectric Withstanding Voltage (Hi-pot): | 3.5kV/1mA/1min |
| Insulation Resistance: | DC500V/100M Ω min |
| Opening Angle: | 180 degree |

Dimensions

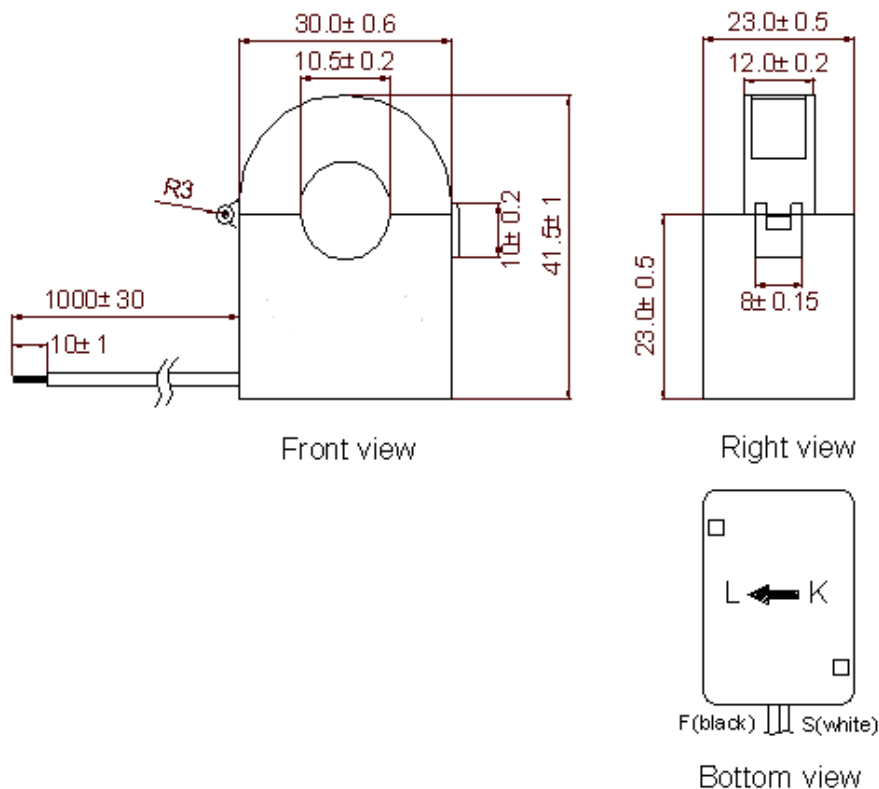

Test Circuit:

