

# Split Core Current Transformer



Shenzhen Sensor Electronic  
Technology Co.,Ltd

## CE-IJCT-24-H


Output: 40mA,60 mA,66.6 mA,75 mA,5A optional

Aperture: F 30.5mm; Accuracy: 1~5%

### Specifications

Operating temperature:	-40~85℃
Primary Current (Amp.)50/60Hz:	50A~800A
Accuracy @ $R_L \leq 10\Omega$ :	Class 1~5%
Turns ratio:	1:10,1:15,1:20,1:30,1:40,1:60,1:80,1:100,1:120,1:160, 1:2000, 1:3000, 1:5000, 1:10000 optional
Dielectric Withstanding Voltage (Hi-pot):	4kV/1mA/1min
Insulation Resistance:	DC500V/100M $\Omega$ min
Opening Angle:	180 degree

### Dimensions

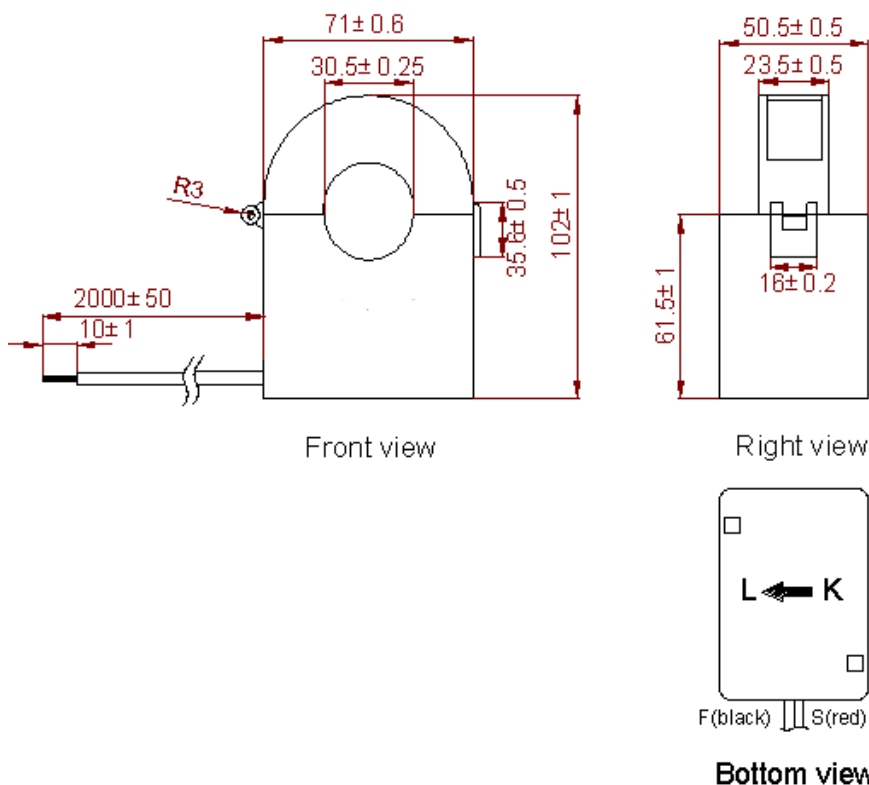

### Test Circuit:

