

Split Core Current Transformer



Shenzhen Sensor Electronic
Technology Co.,Ltd

CE-IJCT-24-I


Output: 100mA, 5A optional

Aperture: 50.8*50mm; Accuracy: 0.5~10%


Specifications

Operating temperature:	-40~85℃
Primary Current (Amp.)50/60Hz:	50A~600A
Accuracy @ $R_L \leq 10\Omega$:	Class 0.5~10%
Turns ratio:	1:10,1:15,1:20,1:25,1:30,1:40,1:50,1:60,1:80,1:100,1:120, 1:1000,1:1500,1:2000,1:2500,1:3000,1:4000,1:5000,1:6000 optional
Dielectric Withstanding Voltage (Hi-pot):	4kV/1mA/1min
Insulation Resistance:	DC500V/100M Ω min
Opening Angle:	180 degree


Dimensions



Top View

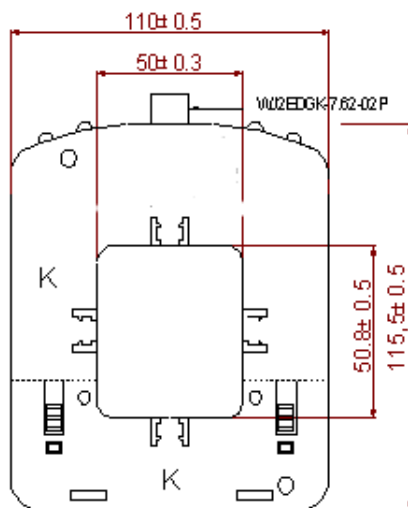

Front View

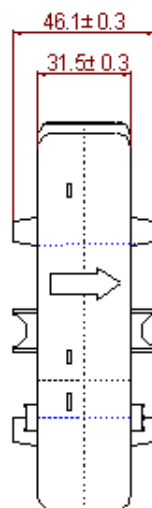

Right View



Test Circuit:

