

# Split Core Current Transformer



Shenzhen Sensor Electronic  
Technology Co.,Ltd

## CE-IJCT-24-J


Output: 100mA, 5A optional

Aperture: 89.8\*50mm; Accuracy: 0.5~1%


### Specifications

Operating temperature:	-40~85℃
Primary Current (Amp.)50/60Hz:	100A~1200A
Accuracy @ $R_L \leq 10\Omega$ :	Class 0.5~1%
Turns ratio:	1:40,1:50,1:60,1:80,1:100,1:120,1:140,1:160,1:180,1:200,1:240 1:1000,1:1500,1:2000,1:2500,1:3000,1:4000,1:5000,1:6000,1:10000 optional
Dielectric Withstanding Voltage (Hi-pot):	4kV/1mA/1min
Insulation Resistance:	DC500V/100M $\Omega$ min
Opening Angle:	180 degree

### Dimensions



Top View

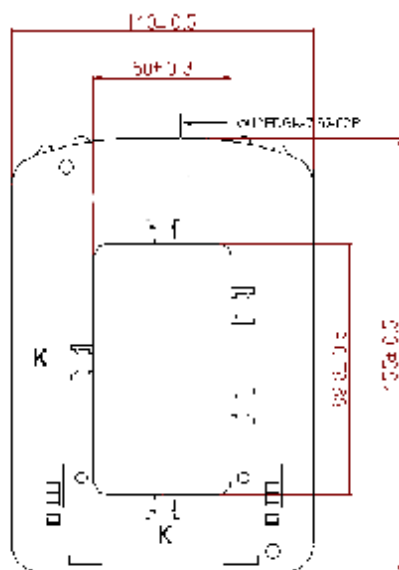

Front View



Right View



### Test Circuit:

