

Split Core Current Transformer



Shenzhen Sensor Electronic
Technology Co.,Ltd

CE-IJCT-24-L


Output: 100mA, 5A optional

Aperture: 160.8*70mm; Accuracy: 0.5~1%


Specifications

Operating temperature:	-40~85℃
Primary Current (Amp.)50/60Hz:	500A~3000A
Accuracy @ $R_L \leq 10\Omega$:	Class 0.5~1%
Turns ratio:	1:60,1:80,1:100,1:110,1:120,1:140,1:160,1:180,1:200,1:240;1:300,1:360,1:400;1:3000,1:4000,1:5000,1:6000,1:10000;1:15000,1:20000 optional
Dielectric Withstanding Voltage (Hi-pot):	4kV/1mA/1min
Insulation Resistance:	DC500V/100M Ω min
Opening Angle:	180 degree


Dimensions



Top View

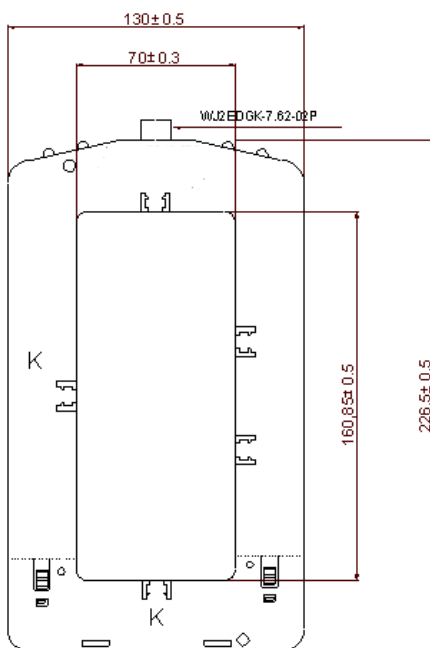

Front View



Right View



Test Circuit:

