

Split Core Current Transformer



Shenzhen Sensor Electronic
Technology Co.,Ltd

CE-IJCT-24-N


Output: 1A, 5A optional

Aperture: F60mm; Accuracy: 1%

Specifications

| | |
|---|--|
| Operating temperature: | -40~85℃ |
| Primary Current (Amp.)50/60Hz: | 300A~2000A |
| Accuracy @ $R_L \leq 10\Omega$: | Class 1% |
| Turns ratio: | 1:60,1:80,1:100,1:120,1:160,1:200,1:240,1:300,1:360,1:400 1:300,1:400,1:500,1:600,1:800,1:1000,1:1200,1:1500,1:1800,1:2000 optional |
| Dielectric Withstanding Voltage (Hi-pot): | 4kV/1mA/1min |
| Insulation Resistance: | DC500V/100M Ω min |
| Opening Angle: | 180 degree |

Dimensions

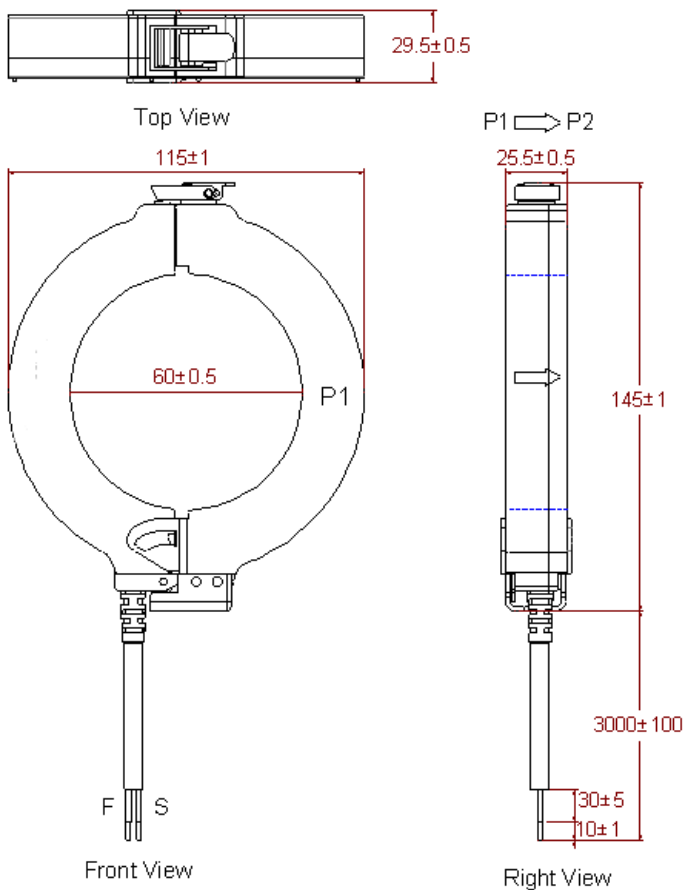

Test Circuit:

